


Discharge Data


Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min			h										
	30	40	50	1	2	3	4	5	6	7	8	9	10	12
1.60	1590	1456	1296	1170	740	556	440	370	320	280	252	232	214	182
1.65	1562	1430	1276	1140	720	538	430	360	310	276	246	226	210	178
1.70	1502	1360	1240	1120	701	512	402	348	300	268	240	220	206	172
1.75	1430	1286	1180	1100	680	502	392	344	294	264	234	214	202	166
1.80	1320	1200	1076	1040	660	500	380	340	280	256	230	210	200	164

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min			h										
	30	40	50	1	2	3	4	5	6	7	8	9	10	12
1.60	2740	2520	2270	2050	1310	1000	810	694	608	540	484	446	410	346
1.65	2710	2468	2220	2040	1294	970	784	670	584	520	470	430	400	342
1.70	2600	2396	2170	2020	1274	930	748	648	556	494	450	414	384	336
1.75	2530	2336	2120	1960	1250	904	736	634	544	480	440	404	376	328
1.80	2400	2200	2030	1870	1205	896	714	618	530	464	430	394	368	320


Performance Curve

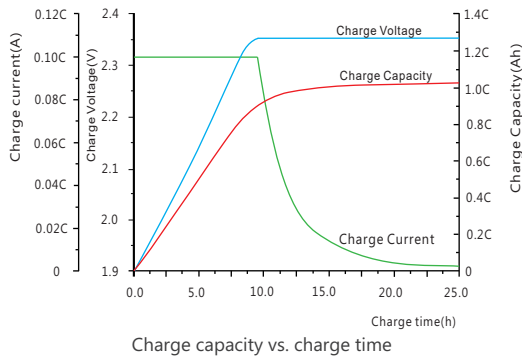


Charge capacity vs. charge time

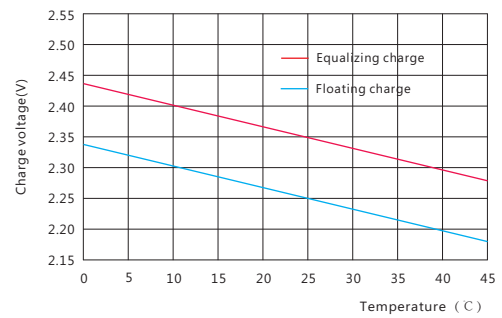

Charge voltage vs. temperature

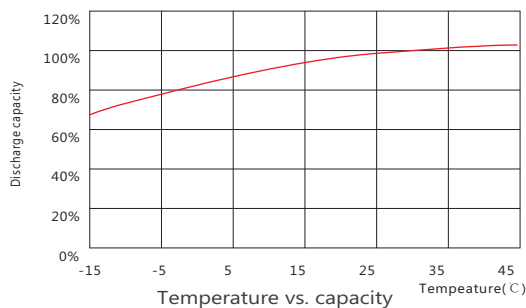

Temperature vs. capacity

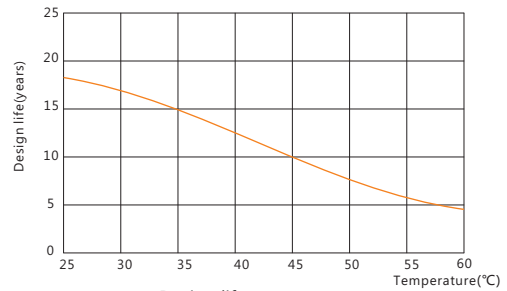

Design life vs. temperature



Disclaimer: The manufacturer reserves the right to amend and/or vary the specifications and parameters of the product and apply updates accordingly at any time. It is the sole responsibility of the buyer and user of the product to ensure all applicable product specifications referred to are valid and up to date. All product specifications are available upon request. Batteries must be installed in accordance with standard BS EN IEC 62485-2:2018, and in accordance with manufacturer's guidelines. (available upon request)