


Discharge Data


Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min							h						
	5	10	15	20	30	40	50	1	1.5	2	3	5	8	10
1.60	546	415	338	287	220	178	149	128	97	78	55.9	36.7	25.4	20.7
1.65	496	380	313	267	208	170	143	125	94.7	76.7	55.1	36.3	25.2	20.5
1.67	476	365	301	258	202	166	140	124	93.6	76.1	54.8	36.1	25.1	20.5
1.70	453	349	289	249	196	161	137	122	92.2	75.3	54.4	35.9	24.9	20.4
1.75	396	321	272	237	189	157	134	120	90.8	74	53.5	35.4	24.7	20.2
1.80	348	298	257	226	182	152	130	115	88.3	72.2	52.7	35.0	24.4	20

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min							h						
	5	10	15	20	30	40	50	1	1.5	2	3	5	8	10
1.60	796	673	559	487	371	300	257	224	173	142	102	67.9	48.9	39.8
1.65	731	611	512	449	344	283	244	217	166	137	99.5	66.8	48.3	39.1
1.67	691	590	496	437	332	276	237	214	164	135	98.7	66.5	48.1	39
1.70	645	560	476	420	321	268	231	210	162	133	97.5	65.9	47.7	38.8
1.75	578	518	444	390	301	252	220	201	158	130	95.5	64.6	47.1	38.3
1.80	531	475	407	360	283	238	212	192	153	126	93.5	63.5	46.5	37.7


Performance Curve

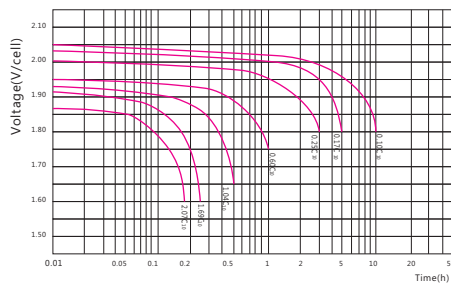


Discharge voltage vs. discharge time

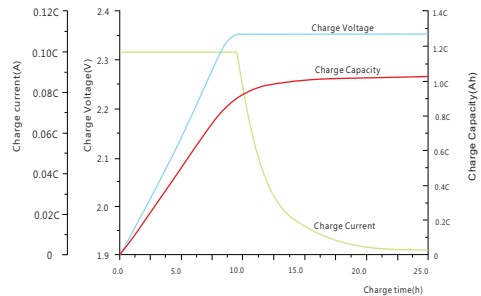

Charge capacity vs. charge time

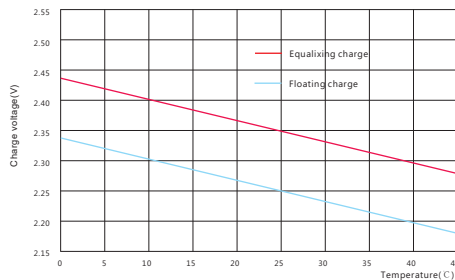

Charge capacity vs. temperature

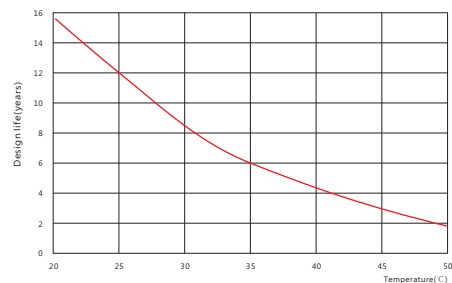

Design life vs. temperature



Disclaimer: The manufacturer reserves the right to amend and/or vary the specifications and parameters of the product and apply updates accordingly at any time. It is the sole responsibility of the buyer and user of the product to ensure all applicable product specifications referred to are valid and up to date. All product specifications are available upon request. Batteries must be installed in accordance with standard BS EN IEC 62485-2:2018, and in accordance with manufacturer's guidelines. (available upon request)