


Discharge Data


Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min							h						
	5	10	15	20	30	40	50	1	1.5	2	3	5	8	10
1.60	819	623	507	430	330	267	224	191	145	117	83.9	55.1	38.1	31.1
1.65	745	570	469	400	312	255	215	188	142	115	82.7	54.5	37.7	30.8
1.67	713	548	452	387	303	249	210	186	140	114	82.2	54.2	37.7	30.8
1.70	680	524	434	373	294	242	205	183	138	113	81.5	53.9	37.4	30.6
1.75	595	482	408	356	284	236	201	180	136	111	80.2	53.2	37	30.4
1.80	522	446	386	339	273	228	195	173	132	108	79.0	52.5	36.6	30

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min							h						
	5	10	15	20	30	40	50	1	1.5	2	3	5	8	10
1.60	1193	1010	838	730	556	451	385	337	260	213	153	102	73.3	59.7
1.65	1096	917	768	674	517	424	366	325	250	205	149	100	72.4	58.7
1.67	1037	885	744	656	498	413	356	321	246	203	148	100	72.2	58.5
1.70	968	840	714	630	482	403	346	316	243	200	146	98.8	71.6	58.2
1.75	867	777	666	585	452	378	331	301	236	195	143	97	70.6	57.4
1.80	797	713	610	539	424	357	319	287	229	189	140	95.3	69.7	56.5


Performance Curve

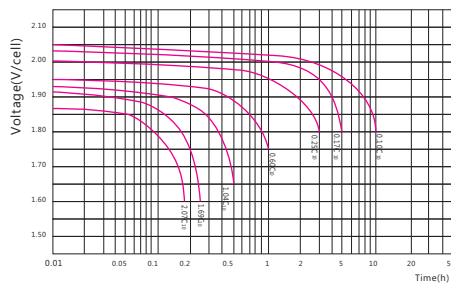


Discharge voltage vs. discharge time

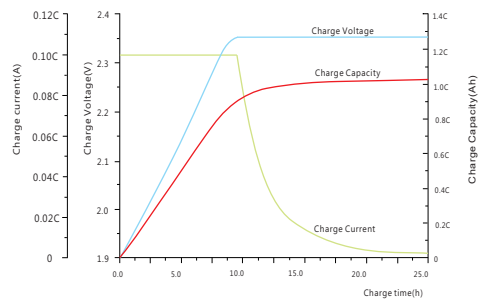

Charge capacity vs. charge time

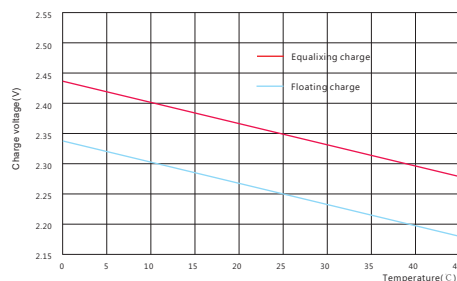

Charge capacity vs. temperature

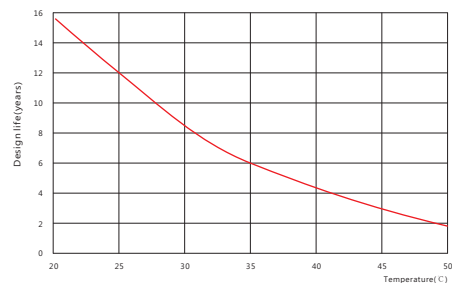

Design life vs. temperature



Disclaimer: The manufacturer reserves the right to amend and/or vary the specifications and parameters of the product and apply updates accordingly at any time. It is the sole responsibility of the buyer and user of the product to ensure all applicable product specifications referred to are valid and up to date. All product specifications are available upon request. Batteries must be installed in accordance with standard BS EN IEC 62485-2:2018, and in accordance with manufacturer's guidelines. (available upon request)