



HRL Series

HRL12-520W (12V135Ah)

Alpha House powered by Sacred Sun HRL batteries feature a new design and structure, utilising automatic welding, through-partition welding, and heat sealing technology. The fully automated production process ensures excellent consistency. These batteries offer high power discharge, long floating backup time, and fast charging performance, making them ideal for use in data centres, UPS systems, and IDC rooms.



Benefits

- Very long life according to EUROBAT Classification
- High power density, 30% higher than ordinary batteries
- Special lead paste formula and additives improve the battery service life
- Maximum charge efficiency
- Low self-discharge rate
- Wide range of power, easy sizing of batteries
- Easy installation and handling


Applications

- Data centre
- UPS
- IDC room
- Emergency power
- HVDC system

Standards

- IEC 60896-21/22
- JIS C8704-1/2
- EUROBAT guide

Drawing

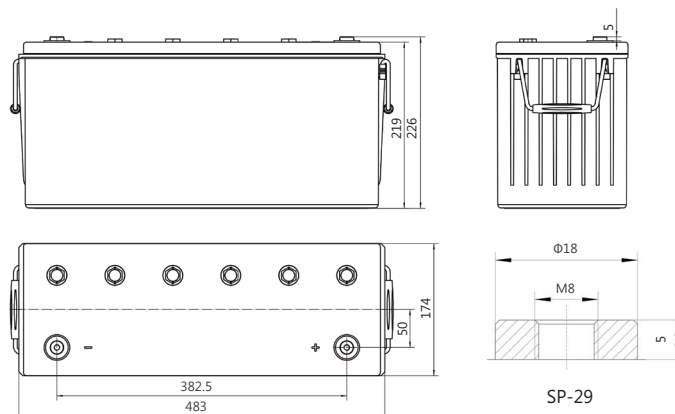

Specifications


Battery Model	HRL12-520W			
Design Life (years, 25°C)	15			
Capacity (Ah, 25°C)	10min (1.60V)	15min (1.67V)	1HR (95.7A, 1.70V)	10HR(13.5A, 1.80V)
	685	520	95.7	135
Dimensions (mm)	Length	Width	Height	Total Height
	483	174	219	226
Approx. Weight (kg)	45.6			
Reference Internal Resistance (mΩ)	2.3 (fully charged @ 25°C)			
Maximum Discharge Current (A/3 Sec.)	1550			
Self-Discharge (25°C)	< 2% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.35(-4mV/°C/cell), max charge current: 40.5A		2.27 (-3mV/°C/cell)	
Short Circuit Current (A)	4100			

Discharge Data


Constant Power Discharge Data (25°C, W/cell)																
End Voltage (V/cell)	min							h								
	5	10	15	20	25	30	45	1	1.5	2	3	4	5	6	8	10
1.60	895	685	531	454	394	331	251	191	143	107	78.6	59.6	50.9	43.9	34.7	28.6
1.65	880	676	525	449	389	326	248	189	142	107	78.2	59.2	50.6	43.6	34.5	28.4
1.67	872	668	520	444	384	321	246	188	141	106	77.8	59.0	50.4	43.5	34.4	28.3
1.70	861	660	513	438	378	315	243	186	140	106	77.4	58.6	50.1	43.2	34.2	28.1
1.75	835	641	496	423	364	301	236	182	138	104	76.3	57.7	49.5	42.7	33.7	27.7
1.80	799	618	476	405	347	285	228	177	134	102	75.0	56.7	48.7	42.0	33.2	27.2

Constant Current Discharge Data (25°C, A)																
End Voltage (V/cell)	min							h								
	5	10	15	20	25	30	45	1	1.5	2	3	4	5	6	8	10
1.60	524	389	298	250	214	176	132	99.2	74.3	55.5	40.5	30.7	26.1	22.4	17.7	14.5
1.65	515	382	293	246	210	173	130	98.0	73.5	55.0	40.1	30.4	25.9	22.2	17.5	14.4
1.67	508	377	288	242	207	170	129	97.0	72.8	54.6	39.9	30.1	25.7	22.1	17.4	14.3
1.70	498	371	282	237	202	166	127	95.7	71.9	54.0	39.5	29.8	25.5	21.9	17.3	14.2
1.75	477	355	269	226	192	157	122	92.6	69.9	52.8	38.6	29.2	24.9	21.5	16.9	13.9
1.80	452	338	253	213	181	146	116	89.1	67.5	51.3	37.6	28.4	24.3	20.9	16.5	13.5


Performance Curve

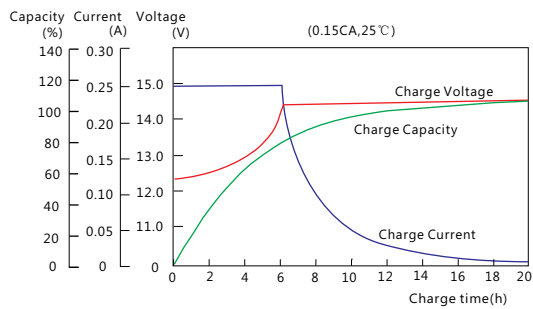


Charge performance

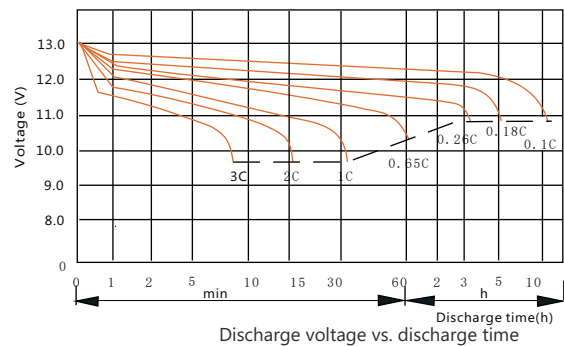

Discharge voltage vs. discharge time

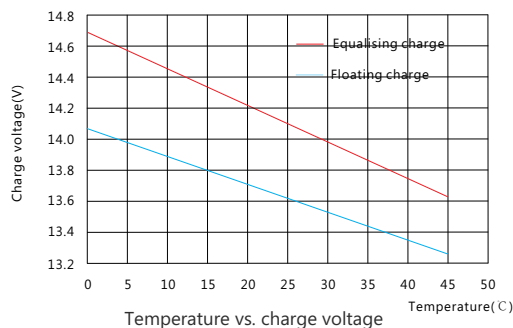

Temperature vs. charge voltage

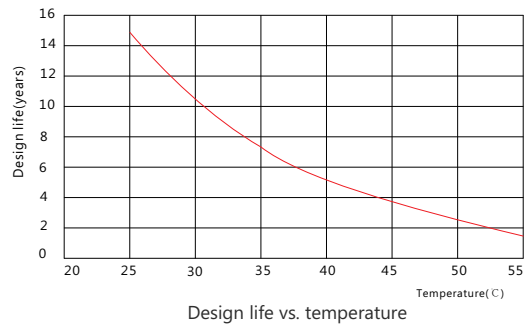

Design life vs. temperature



Disclaimer: The manufacturer reserves the right to amend and/or vary the specifications and parameters of the product and apply updates accordingly at any time. It is the sole responsibility of the buyer and user of the product to ensure all applicable product specifications referred to are valid, applicable and up to date at all times. All product specifications are available upon written request to Alpha House Ltd. All batteries must be installed, used and maintained at all times in accordance with standard BS EN IEC 62485-2:2018, and specifically installed, used and maintained at all times in accordance with manufacturer's guidelines and product specification documentation. (All top terminal, front terminal and top vented batteries must be positioned horizontally, plumb and level at all times unless specified otherwise by the manufacturer. Further details are available upon written request to Alpha House Ltd.)