
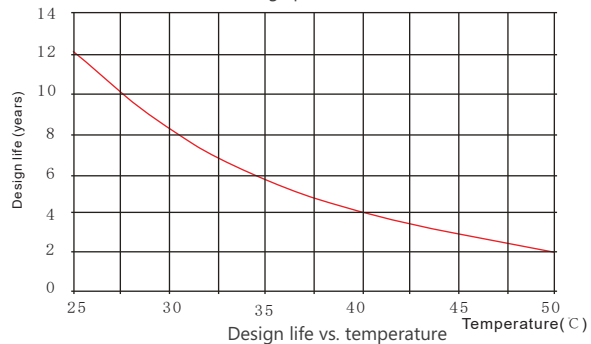
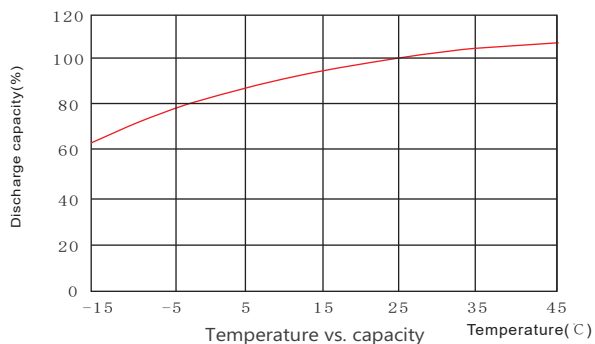
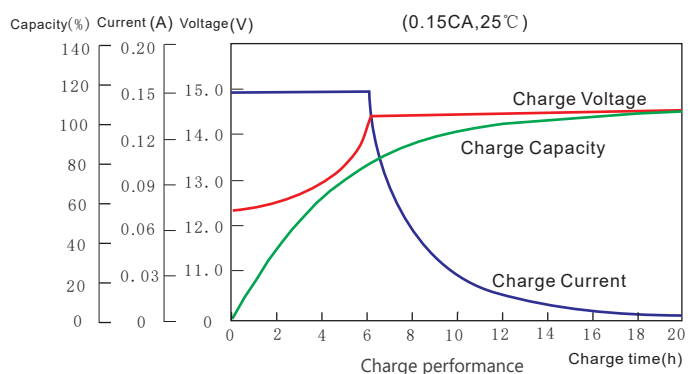


Discharge Data

Constant Current Discharge Data (25°C, A)													
End Voltage (V/cell)	min						h						
	10	15	20	25	30	45	1	1.5	2	3	5	6	10
1.60	410	352	295	249	212	152	110	92.8	68.1	49.4	31.6	27.0	17.0
1.65	392	340	285	241	198	148	106	90.6	66.6	47.9	31.1	26.6	16.9
1.67	380	329	277	235	193	145	105	88.8	65.4	47.0	30.7	26.3	16.8
1.70	367	317	269	227	188	141	103	87.3	64.5	46.1	30.2	26.1	16.7
1.75	345	304	255	216	178	136	99.0	84.5	62.7	44.7	30.0	25.8	16.6
1.80	321	285	238	206	165	129	95.4	81.4	60.6	42.9	29.1	25.4	16.5

Constant Power Discharge Data (25°C, W/cell)													
End Voltage (V/cell)	min						h						
	10	15	20	25	30	45	1	1.5	2	3	5	6	10
1.60	720	632	522	450	366	289	232	176	134	91.7	62.2	54.5	34.2
1.65	690	614	506	441	359	283	225	171	130	89.0	61.1	53.6	33.4
1.67	666	600	489	432	352	278	221	165	127	87.2	59.7	52.3	33.2
1.70	639	582	471	417	344	272	216	162	125	85.3	59.0	51.9	32.8
1.75	613	554	453	404	331	269	210	158	123	83.9	58.0	50.7	32.3
1.80	584	534	434	389	318	258	201	154	119	82.3	56.2	49.4	31.3

Performance Curve

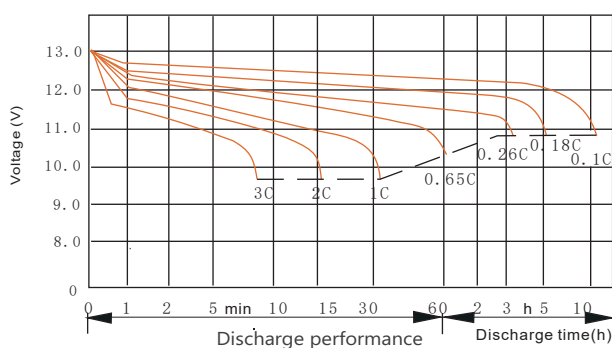

Disclaimer: The manufacturer reserves the right to amend and/or vary the specifications and parameters of the product and apply updates accordingly at any time. It is the sole responsibility of the buyer and user of the product to ensure all applicable product specifications referred to are valid and up to date. All product specifications are available upon request. Batteries must be installed in accordance with standard BS EN IEC 62485-2:2018, and in accordance with manufacturer's guidelines. (available upon request)